

KDY127/12B

浙江工商大学

2017 01

1  
2

3


4  
5

6

7

8

GB3836

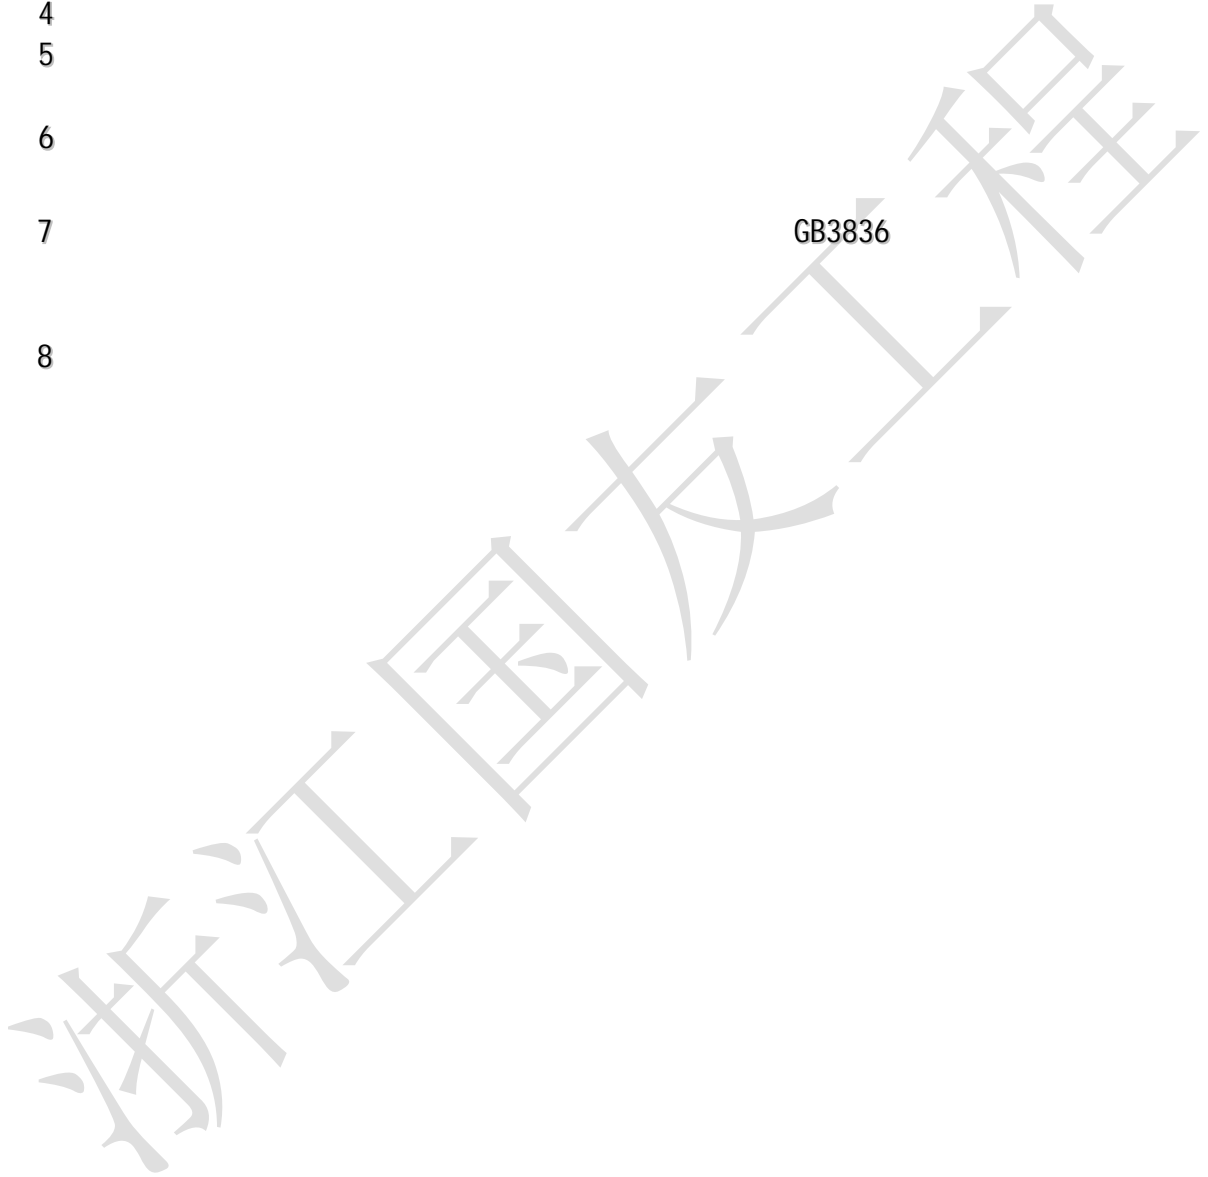

1

1.1

KDY127/12B

2

1.2

- a) 0 +40
- b) 95 +25
- c) 80kPa 106kPa
- d)
- e)
- f)


1.3

1.3.1

1.3.2

Exd[i b] Mb

1.4

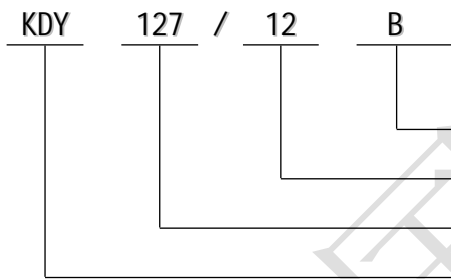

1.5

- a) 351mm 373mm 187mm × ×
- b) 32kg

2

2.1

AC 127V 75% 110%

2.2

2.2.1 12V 2

- a) :DC 11V 12.5V
- b) :1000mA
- c) - : 250mV
- d) : 1100mA
- e) : 20mA

2.2.2 5V 1

- a) :DC 4.5V 5.5V
- b) :1.8A
- c) - : 250mV
- d) : 2.1A
- e) : 20mA

2.2.3

- a) Ni -MH
- b) 0.1s
- c) 2h
- d) DC 13.5V 15V
- e) DC 9.5V 10.5V

DC1.2V 10 15Ah

2.3

- a)
- b)
- c)

2.4 3 2 12V 1 5V

2.4.1 DC12V

U0 12.5V I0 1100mA C0 20μ F  
 L0 0.1mH

2.4.2 DC5V

U0 5.5V I0 2100mA C0 47μ F  
 L0 0.1mH

3

3.1

GB/T22084. 2-2008

- a) 127V
- b)
- c) 3

3.2

DC-DC

4

4.1

4.2

4.3

127V

5

5.1

5.2

5.3

5.4

5.5

5.6

5.7

5.8

6

6.1

a

b

6.2

a

b

c

7

7.1

7.2

7.3

8

8.1

8.2

-10 +40 ,

90% ,